

Documents the purpose and usage of the component

and defines the appearance of the component. To access and edit the component description, open the Description panel from inside the component and select the empty canvas.

Description: Provides the text describing the use case requirements, licensing and copyrights, disclaimers, and any other extra information you would like to add

Icon: Drag and drop a PNG 16x16 px from your local file system. The icon will appear on the component, giving it a unique look.

Color: Usually the color of nodes and components is associated with a precise category. Pick the category that best fits your use case: The selected color appears behind the logo

Tags: The keywords by which the search results in KNIME Community/Business Hub can be filtered


Links: If the description of the component needs to provide links to external resources.

Author: The name of the component builder can be mentioned here.

In/out ports: Describe the ports requirements here. For example: What kind of input column types are supported? Are there new rows/columns in the output? Does the input/output connect only to a precise other node or component?

Options: The component description also lists all the settings available inside the component dialog. To add text describing the settings usage open each configuration node dialog and enter it there node by node.

Configure



:

Single Selection Configuration: Creates a list of Single Selection Configuration options of type String for a menu or radio buttons. Define options in the configuration dialog together with the selected default value. This node produces the value of the selected option. 000 which can be used inside the component to

> configure other node settings Boolean Configuration: Creates a boolean selection for an enabled/disabled flag (1/0) in the

form of a checkbox. This node produces the value \Box of the selected option in a flow variable at its output port. Usually adopted to configure switch

000 nodes and trigger different component modes. Column Filter Configuration: Selects the Column Filter

columns of the component input table. Set the ▶ ±0,± ▶ node to include or exclude all columns by default. Useful to remove columns that the

component should not use in its execution. 000 String Configuration: Creates a string flow

variable for configuring other nodes inside the component. Pick a default value so that the user

understands how this component setting works.

The string flow variable is useful to determine how 000 to rename the component output columns or for text displayed in the component's composite view

> Create: To create a component multiple-select all the nodes you want to encapsulate in the component. Now right-click the selection and select "Create Component".

> Configure: If you included a Configuration node in the component, open the configuration dialog. Change the component settings here before executing, just like any KNIME node.

Open view: After executing a component that contains a Widget or View node, you can open its interactive view. In the opened composite view, interactivity across the single views and widgets nodes in the component is activated by default: visualizations sharing the same input table are usually connected via selection and filter events

Dialogue layout panel

The component dialog stacks one setting for each

configuration node in the component. From inside the

Configuration Dialog Layout tab. Drag and drop tiles to

Finish Cancel

Reset Apply * Close *

Т

000

change the component settings based on sequential


steps the user should follow, from top to bottom.

component, select the Node Usage and Layout icon

from the top toolbar. In the panel select the

2000 🖗 🗄

4:9:0 - My Comp

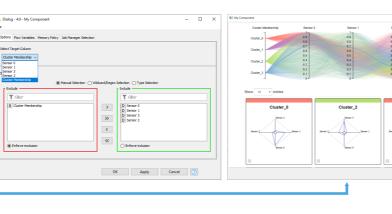

Shared components

Components can be reused as your personal customized KNIME nodes or they can also be shared with others via KNIME Hub and KNIME Server.

> To share a component choose the destination for the shared component in the window that opens. Now the component is shared and it can only be edited in its new location: A green arrow appears on top of the component to represent the link between the instance and the shared component in the KNIME Explorer. The link can be of relative type when the component is shared locally.

Manual update is useful to make sure your component is still up to date. A check for updates can be automated or prompted based on your KNIME Preferences. If an update is found but you opt out, the green arrow becomes red. If the link between the instance and the shared component is no longer valid the green arrow will become a red cross.

The owner of the shared component can edit its new location on the KNIME Explorer. After editing, KNIME can update the shared component instances in other workflows. If you are using someone else's shared component you can still edit it, but first you need to break the link: note that then you won't be able to get updates anymore.

Widget nodes

Image Output Widget Image Output Widget: Displays an SVG or PNG image in the composite view of the component. The static image can be displayed in different pixel sizes and it usually comes from a Table to 000 Image node connected to this widget. Interactive Range Slider Filter Widget: active Range Sl Filter Widget Creates a slider to filter data to only include


Ŧ rows with values in the selected column within the specified range. The slider can interact with most of the other views inside 000 the component when connected to its output. Text Vie

Text View: Displays text output provided by a user. Useful to create text or number infographics in Interactive Views or Data Apps.

Column Selection Widget: Creates a list of selectable columns from the input data table in ► ±<u>l</u>± the form of a menu or radio buttons. The node produces the name of the selected column in a 000 flow variable at its output port Refresh Button Widget: Offers a button to be fresh Button Widge placed in the composite view to trigger workflow execution. When clicked, the nodes after this widget re-execute and if any of them are widgets 000 or views they are also updated.

Composite view layout

By default KNIME stacks views and widgets from top to bottom in the composite view. Access the Composite View Layout tab via the Node Usage Layout panel from inside the component. Define the layout of the composite view with tables: reset/clear the current layout (top left buttons); drag rows from the left; add columns using "+"; drag the views/widgets on the left into the empty structure. Optionally set the ratio or pixel sizes of individual views/widgets via the gear button.



Scripted components

Component builders can optionally implement component functionalities through coding. KNIME supports a number of coding frameworks as well as ways to ship dependencies with the component.

Generic JavaScrip View Generic JavaScript View: Offers a code editor for JavaScript to implement a custom view. Optionally feed JS in data to visualize it based on your implementation. The node offers checkboxes for a few dependencies (d3.js, 000 ..) as well as a CSS editor

R Snippe table. KNIME executes the R installation configured R 000 KNIME Interactive R Statistics Integration

Python Script

- <mark>-</mark>

000

S

000

Python Script: Offers a code editor for Python to process any number and type of inputs into outputs: three dots or the outside of the node means you can add ports. KNIME executes the Python installation configured either in the node settings and/or in KNIME Preferences.

Conda Environment Propagation: Automatically installs the Conda environment necessary for your component to execute the downstream R/Python nodes. The environment usually includes the R/Python installation plus precise versions of the libraries. Useful to share scripted components with the necessary dependencies. Requires installation of Anaconda or Miniconda and minimal configuration in KNIME Preferences.



000 View 000 000 . Create



Component setup

component creation. The panel offers a text field to edit the

adding a new port, a drop down menu appears to define the

You can still change component names and ports after

title, buttons to change the order, remove or add. When

port type



Verified Components

Verified Components behave like actual nodes and are regularly released on the KNIME Hub. Browse them all at knime.com/verified-component. Each new component is assigned to one of the 9 categories, represented by a color and symbol.

Global Featu

▶ 7

Automation Example - AutoML: AutoMI Trains classification models and outputs the best one in an automated fashion. The component adopts Integrated Deployment to $\bigcirc \bigcirc \bigcirc$ capture the end-to-end process as an optimized workflow

Visualizations Example Animated Bar Chart: Visualizes a bar chart changing

over time via a Generic JavaScript View node. Each visual bar represents a different category, 000 racing in range with the others in a smooth animation


Data Manipulation Example Python Transform Python Transform:

A series of transformations have been implemented via the KNIME Python Integration. Use it to learn 000 how to reliably package your Python scripts for other KNIME users.

Guided Analytics Example · Model Monitor View: Model Monitor View Once a classifier model is trained and deployed, it can be monitored The component generates a chart with performance over time and $\bigcirc\bigcirc\bigcirc\bigcirc$ controls for re-training of the model

Finance Analytics Example -Measure Fractional Years: Computes the fraction of the year of the difference between two dates, similar to the $\bigcirc\bigcirc\bigcirc\bigcirc$ YEARFRAC function in Microsoft Excel.


Model Interpretability Example -**Global Feature Importance:** Computes and visualizes global feature importance for an input model with four available model-agnostic XAI techniques



Uses a Java based library to extract the main textual content from a web page to analyze 000 online trends for Search Engine Optimization (SEO).

Life Sciences Example Molecular Properties Filter : Selects a subset of molecules based on molecular properties via RDKit nodes. The Interactive View depicts the properties and structural formula of the selected molecules

OO(📕 Component > 📘 Share...





SARIMA Learner 000

Configure


Q Open View

Web Text Scraper Web Text Scraper :











000





R Snippet: Offers a code editor for R to process a KNIME either in the node settings and/or in KNIME Preferences. More nodes with different ports are available from the

12



Heatmap: Visualizes tabular data using a color-coded matrix, revealing patterns and correlations.

View nodes

Parallel Coordinates Plot: Displays one curve for every row and one parallel axis for each included column, both numerical and categorical. Useful to explore data points over several dimensions ▶ 💥 looking for interesting patterns. It can



JS

automatically publish and subscribe to interactive events when it shares the same input with other views and/or interactive widgets in the component selected column on the y axis. The x axis in between the curves is based on another column



Line Plot (Plotly): Displays a curve for each or the RowID. This view comes from the KNIME Plotly Integration, a JavaScript based open source visualization library.

Flow variable filter

Filters the flow variables at the input and output of the component. Double-click the Input and Output ports inside the component to access a dialog. By default, flow variables pre-existing upstream of the component input cannot be used inside. Similarly, by default, flow variables generated within the component cannot be used downstream of the component output.

conigoration	How variables	Job Manager Selection Choose varia			sible inside the Component		
r Exclude		۱	Ianual Selectio	n 🔿 Wildca	rd/Regex Selection		
	sble_1			>	Troube		
) Enfo	ce exclusion			< «	Enforce inclusion		
Add pre	fix to all variables				outer.		

Error handling



Breakpoint: Fails on purpose when a certain condition is met. A custom error message appears on the node and on the outside of the component. Use it to detect whether the input or configurations of the component satisfy minimum requirements and provide the user with an intuitive message on what should be fixed after making the component fail on purpose.



Try (Data Ports): Starts a try-catch construct to enable an alternative path for the data flow in case of failure in the main branch. One branch is defined as the main branch while the other is set as the secondary branch. If execution fails in the main branch, the seconaary branch is activated. It must be closed by a Catch node.



Catch Errors (Data Ports): Closes a try-catch construct started with a Try node and collects the results from the active branch.

Resources

KNIME Press: Access various data science books and other cheat sheets at knime.com/knimepress, including beginner and advanced topics.

• KNIME blog: Engaging topics, challenges, industry news, & knowledge nuggets at *knime.com/blog*.

 Self-paced courses: Take our free online self-paced courses to learn about data analysis, data engineering, or data science with KNIME (with hands-on exercises) at *knime.com/learning*.

KNIME Community Hub: Browse and share workflows, nodes, and components or access collection pages for dedicated topics at hub.knime.com.

• KNIME Forum: Join our global community & engage in conversations at forum.knime.com.

• KNIME Business Hub: For team-based collaboration, automation, management, & deployment check out KNIME Business Hub at *knime.com/knime-business-hub*.

KNIME Press

Extend your KNIME knowledge with our collection of books from KNIME Press. For beginner and advanced users, through to those interested in specialty topics such as topic detection, data blending, and classic solutions to common use cases using KNIME Analytics Platform - there's something for everyone. Available for download at www.knime.com/knimepress.

